

Automatic Control

If you have a smart project, you can say "I'm an engineer"

Staff boarder

Dr. Mohamed Saber Sokar

Dr. Mostafa Elsayed Abdelmonem

Instructor

Eng. Ahmed Allam

Eng. Abdelrahman Mousa

Automatic Control

MPE 424

- **Course aims:**

- Understand the mathematical modeling of other systems
- Understand the different classic control strategies
- Understand and design the control systems
- Create and innovate the real model to simulate the some cases

- **References**

- Dorf, R. C., & Bishop, R. H. (2001). Modern control systems. Upper Saddle River, NJ: Prentice Hall. (Ref-01)
- Ogata K. (2002). Modern Control Engineering. 4th ed.,Prentice Hall, New Jersey. (Ref-02)

Course plan

week	Date	Contents	Requirements	Laboratory	References	Marks	Instructor
1	14-2	Introduction Syllable/Course specs Control system classifications Laplace transform			Ref-01		Dr. Mostafa Elsayed
2	21-2	Modeling - Mechanical system - Hydraulic system	Project idea and team names	DC-Motor control			
3	28-2	Modeling - Electrical system (motors and combined systems)	Quiz			5/3 quizzes	
4	7-3	Block diagram Transfer function and State space		Electrical-mechanical analogy			
5	14-3	Time Response (1 st and 2 nd order)	Quiz			5/3 quizzes	
6	21-3	Steady state Error Stability analysis	Progress report	Filters			
7	28-3	Midterm					

Course plan

week	Date	Contents	Requirements	Laboratory	References	Marks	Instructor
8	4-4	Frequency Response Nyquist plot	Reports (smart building)	DC- motor Kit	Ref-01	5	Dr. Mohamed Saber Sokar
9	11-4	Frequency Response Bode Plot	Quiz	Operational amplifier circuits		5/3 quizzes	
10	18-4	Design Controller and system compensation			Ref-02		
11	25-4	Design PID controller Optimal and LQR control					
12		Receive project				15 for project and report	

Evaluation rules

Report Contents

- Research plane
- Aim
- Tools/facilities
- Methodology/control strategy
- Experimental works
- Result/ conclusions

Marks distribution

Marks \ assessments	Assessments	Final Exam	Total	
	• MidTerm	15	70	
	• Projects	10		
	• Report & Quiz	5		
TOTAL		30	70	100

Projects

- **Smart building project**

- **Power supply**


- On grid/ off grid renewable energy (01)
- Energy harvesting (02)

- **Smart system**

- Lighting system (03)
- HVAC system (04)
- Security system (05)
- Parking system (06)

- **Storage system**


- Energy storage (07)
- Thermal storage (08)

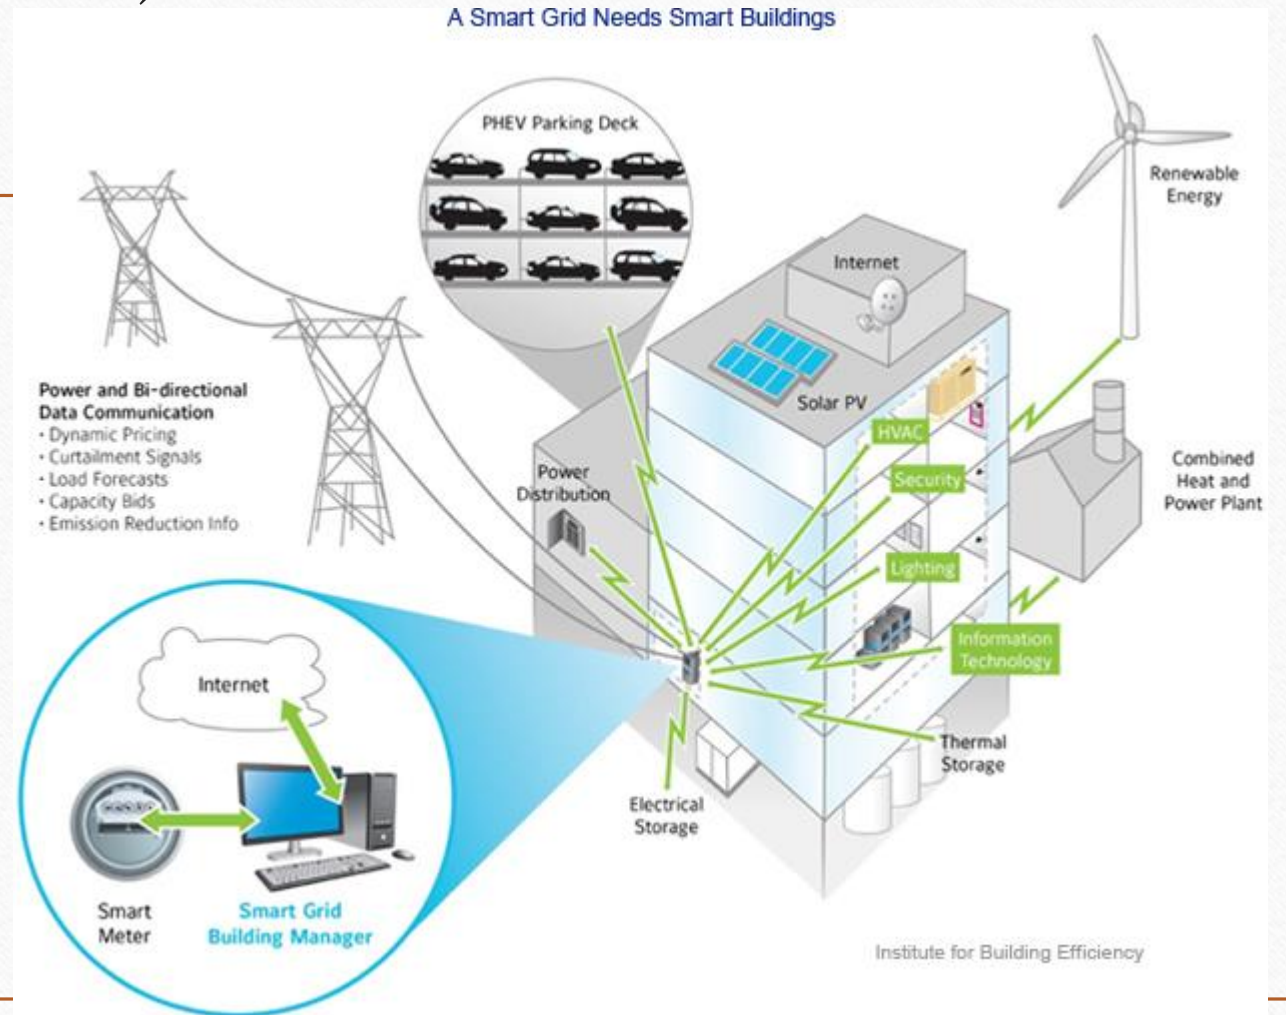

Projects


- **Smart building project**

- The system is based on the LabVIEW software and can act as a security guard of the home.
- The system can monitor the temperature, humidity, lighting, fire burglar alarm, gas density of the house and have infrared sensor to guarantees the family security.
- The system also has internet connection to monitor and control the house equipment's from anywhere in the world.

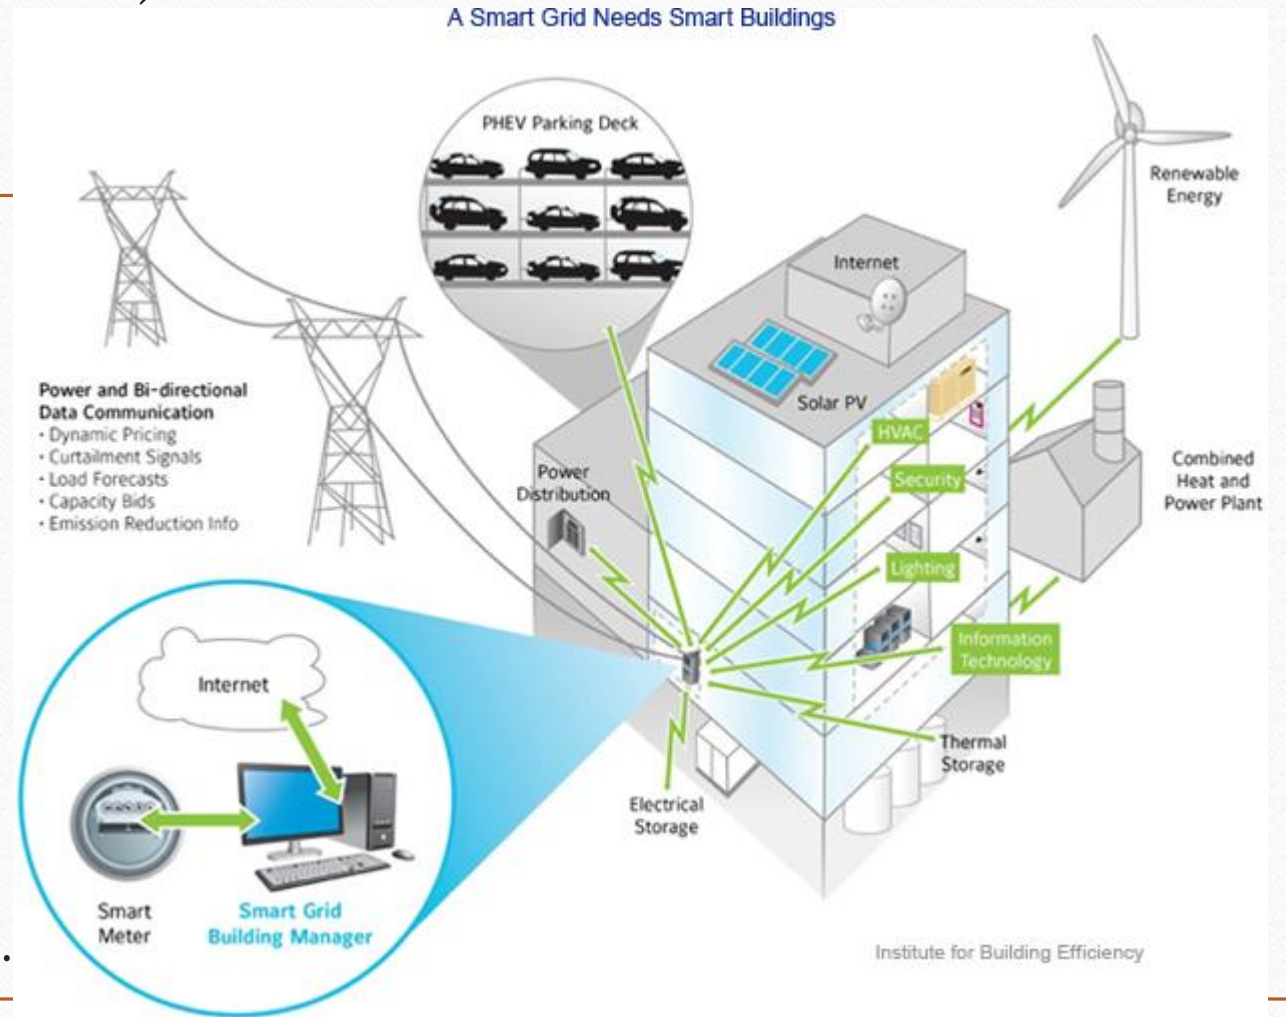

Projects

- **Smart building project**
- **Project team**
 - Teams of typically of 10-12 students
 - Immediately begin to develop project ideas
 - Each team prepare a full report.

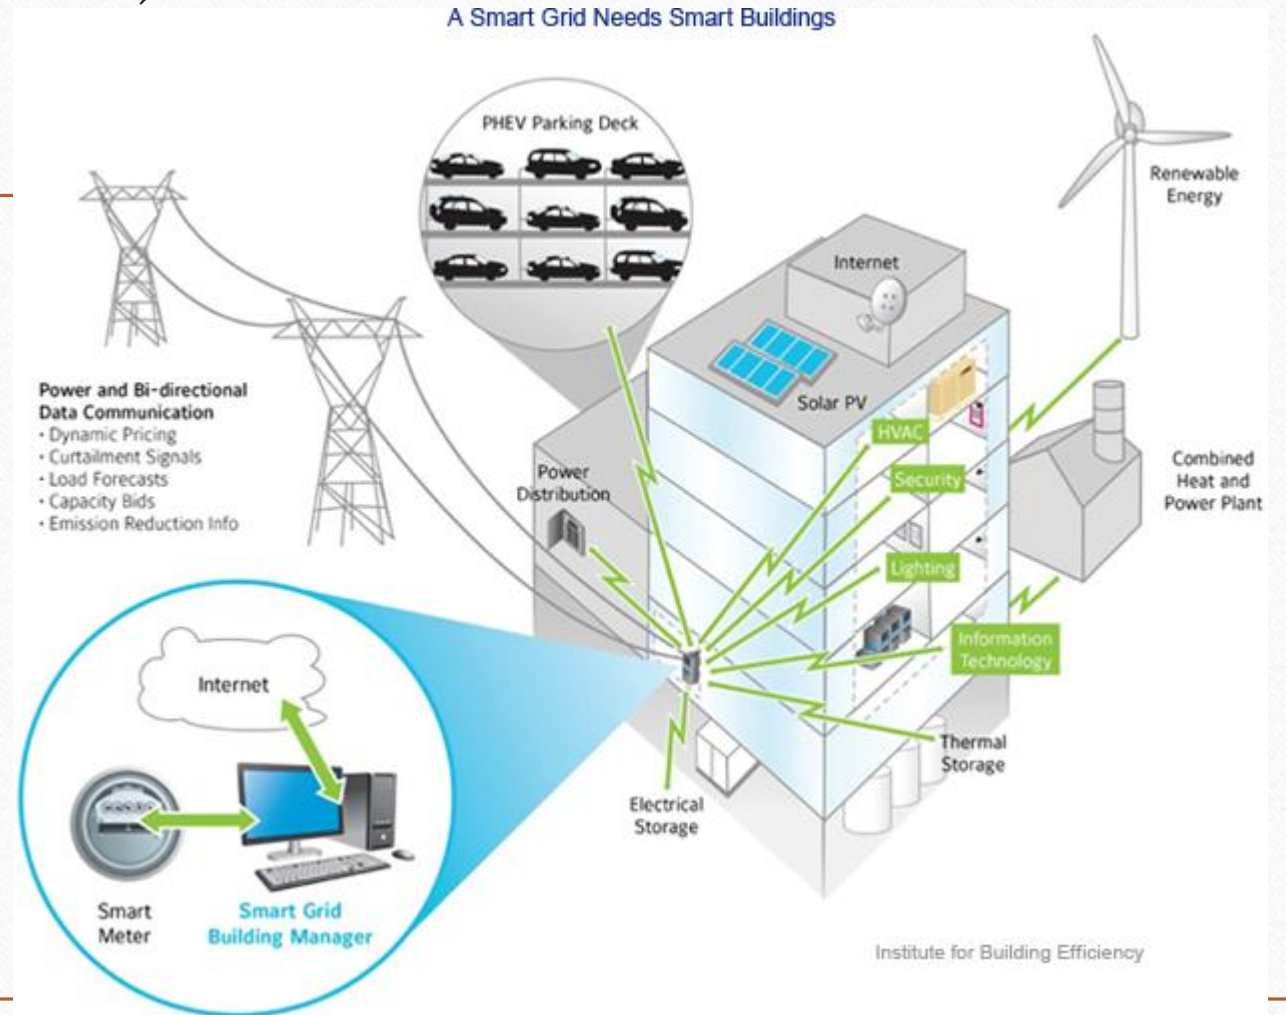



Automatic Control

- **Lecture aims:**
 - Understand a definition of a control system
 - Facilitate combining and manipulating differential equations
 - Identify the equations of motion of systems

Automatic control system


Closed-Loop Control System

Open-Loop Control System

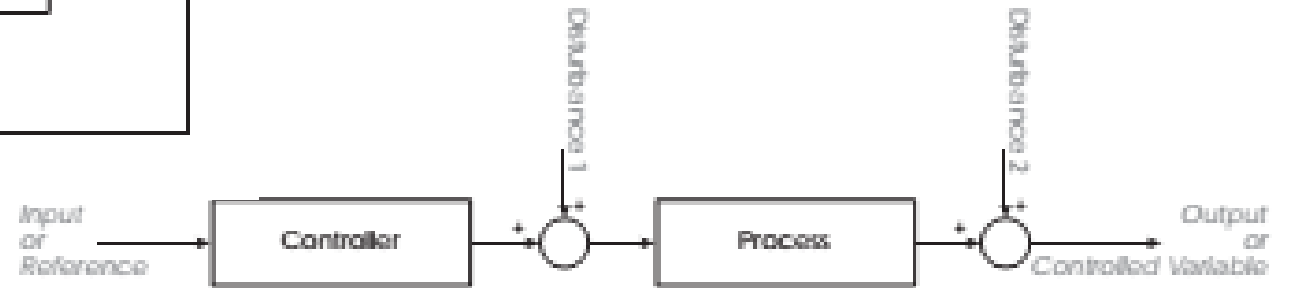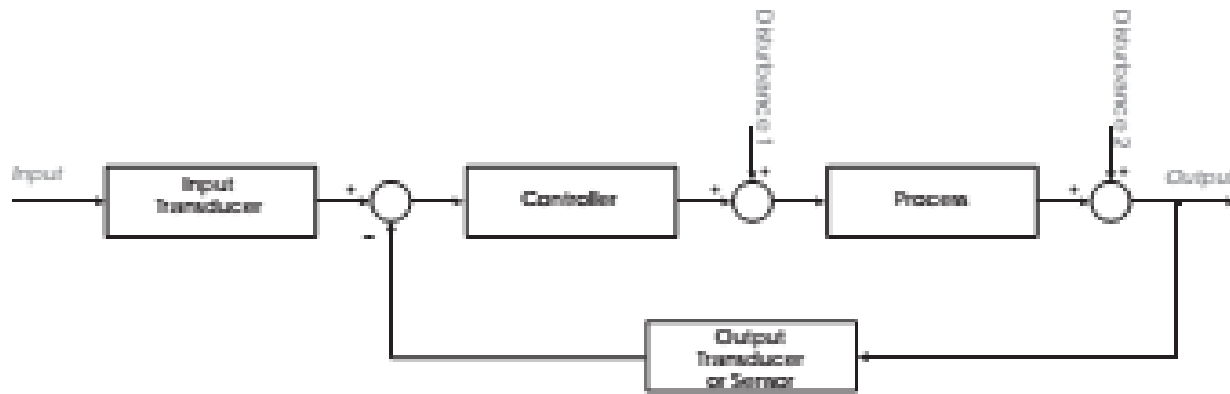


Automatic control system

Closed-Loop Control System

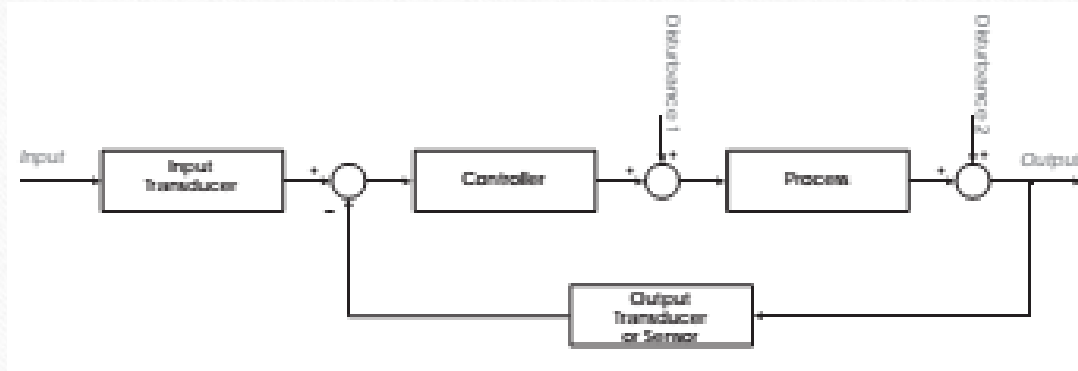

Open-Loop Control System

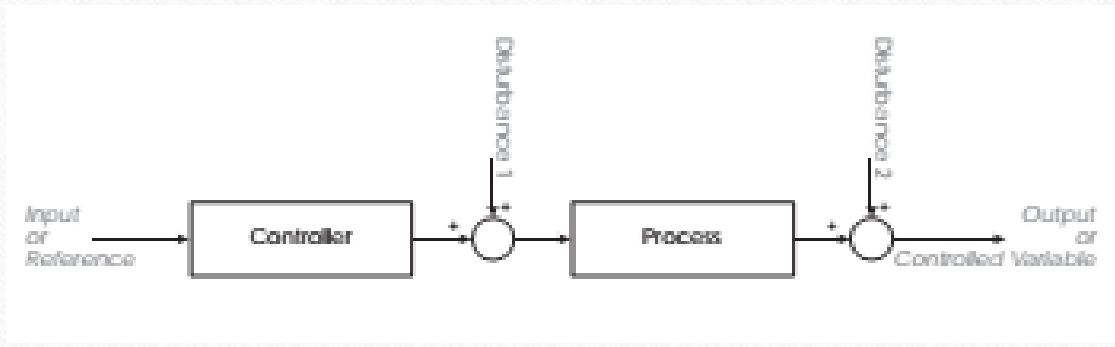

Input temperature dial position converted into a voltage by a potentiometer.

Output temperature converted to a voltage by a thermistor.

Differencing circuit subtracts output from input result is actuating signal - controller drives the plant only if there is a difference


Process is a boiler, input is fuel, output is heat.

Controller is electronics, valves, etc. that control fuel flow into furnace.


Input is thermostat position

Automatic control system

Closed-Loop Control System

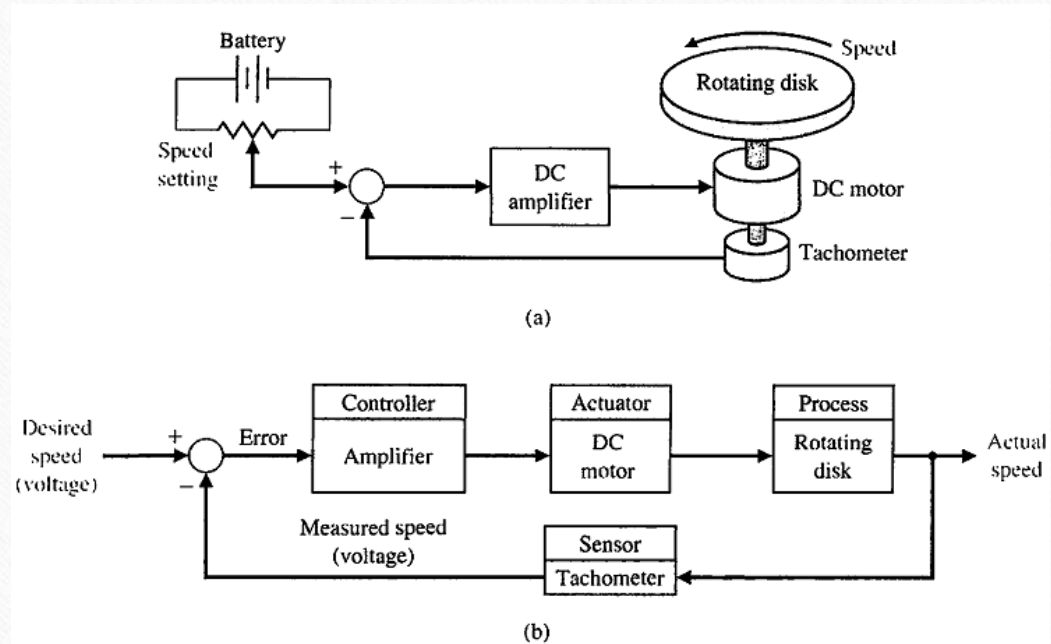


Open-Loop Control System

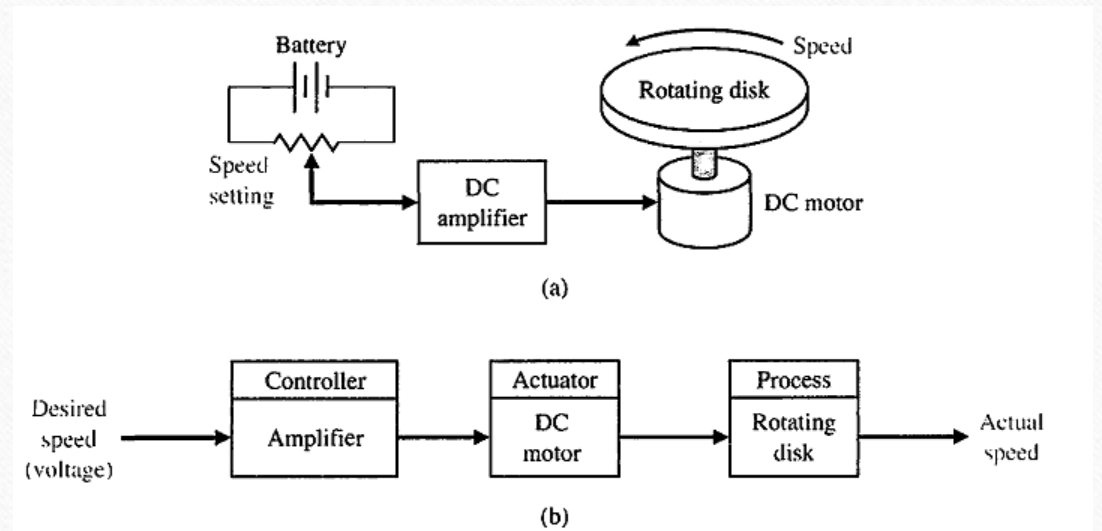

Automatic control system


Azimuth Position Control System Example

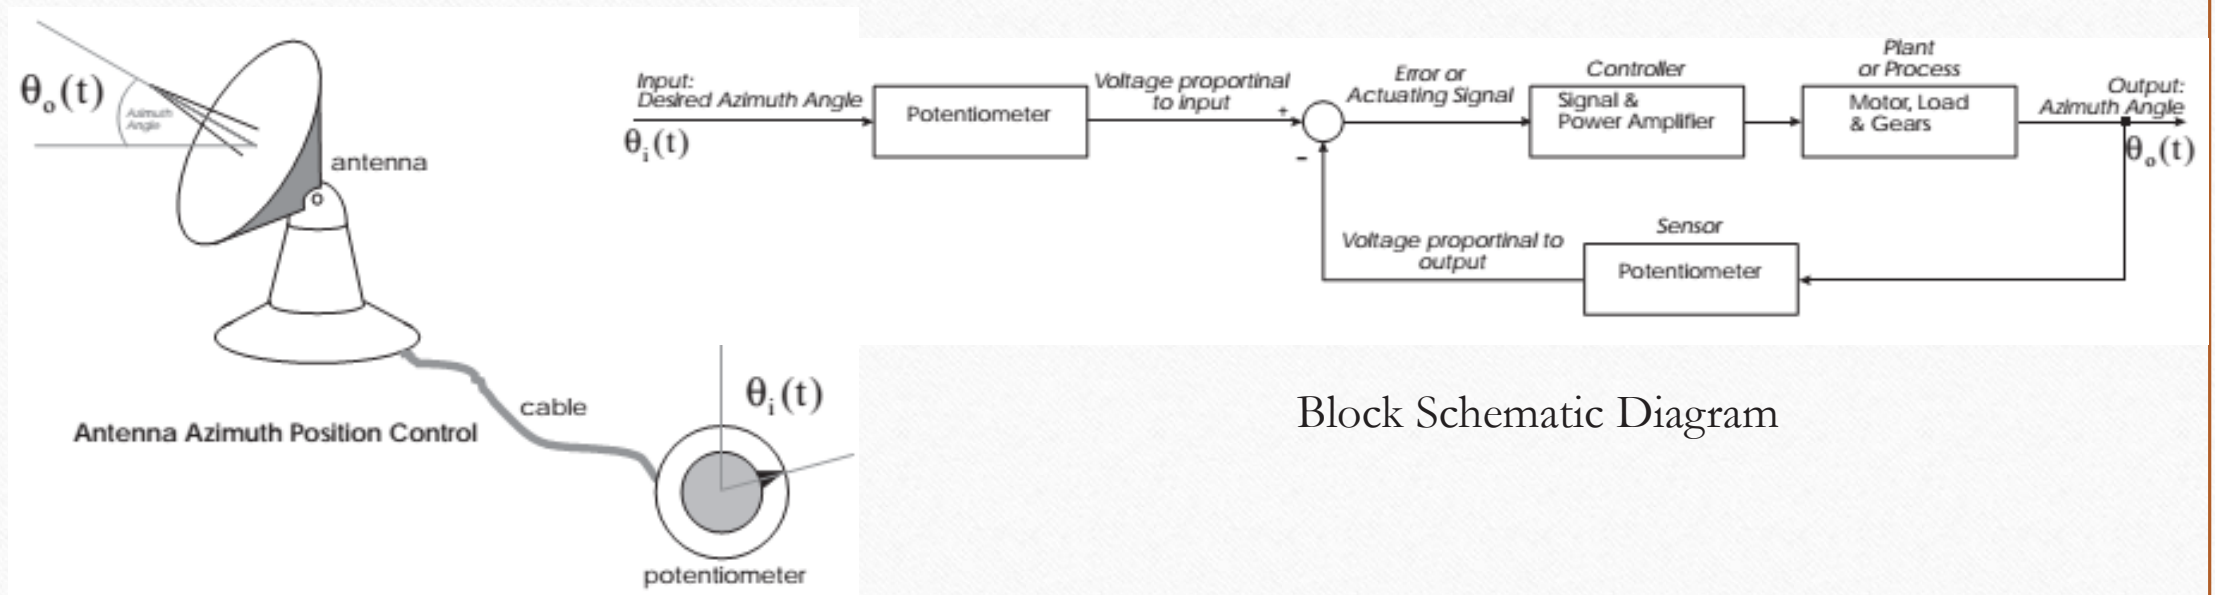

Automatic control system

Transform the Physical System into a Schematic


- Makes relationships more concrete
- Enables decisions to be made about what can be neglected in formulating the mathematical model.
- Assumptions made can be easily reviewed and schematic and/or model adjusted as necessary.
- Should be kept as simple as possible:
 - Checked by analysis and simulation
 - Phenomena added if results do not agree with observed behavior

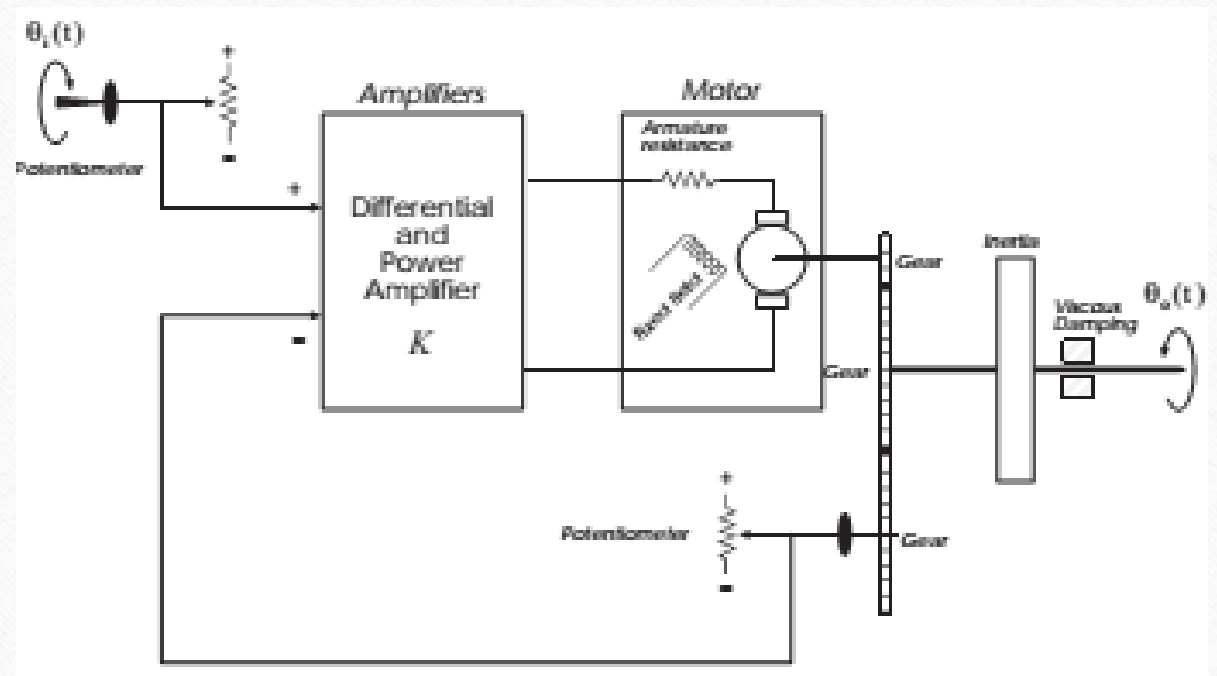


Block Schematic Diagram

Automatic control system

Must have fundamental method for modelling many physical systems:

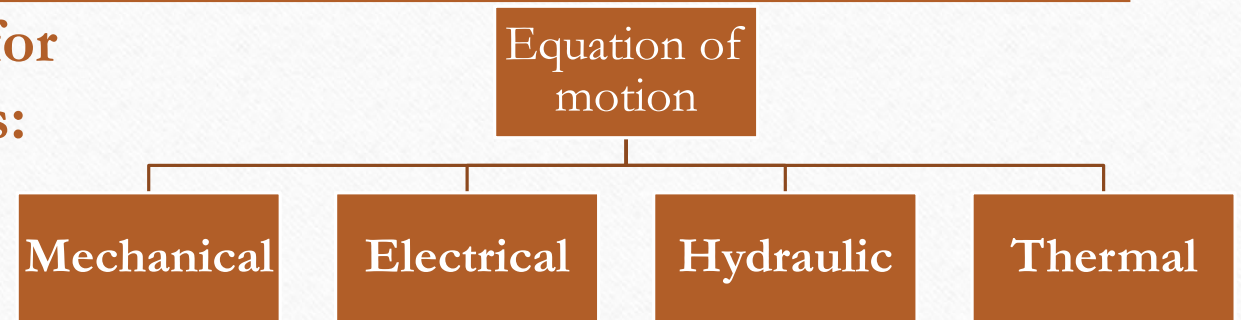


Must have fundamental method for modelling many physical systems:

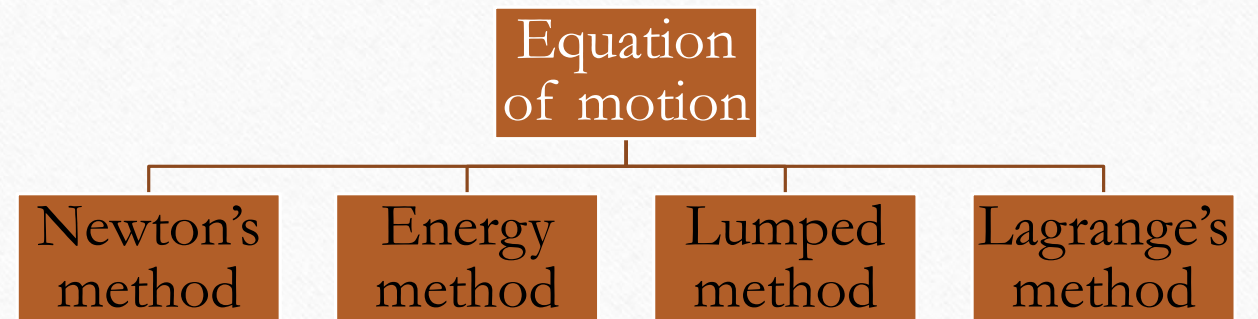

Automatic control system

Mathematical Models for the Schematic

- Understand the physical system and its components
- Make appropriate simplifying assumptions
- Use basic principles to formulate the mathematical model
- Write differential and algebraic equations describing the model
- Check the model for validity

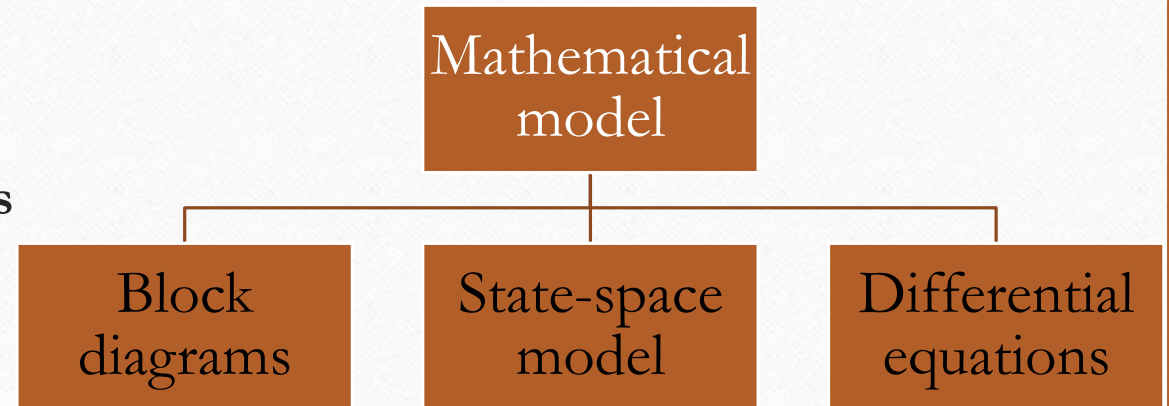

Automatic control system

Defination of Laplace Transform

Given a function $f(t)$, its Laplace transform, denoted by $F(s)$ or $\mathcal{L}[f(t)]$, is given by

$$\mathcal{L}[f(t)] = F(s) = \int_{0^-}^{\infty} f(t)e^{-st} dt$$

where s is a complex variable given by

$$s = \sigma + j\omega$$

The Laplace transform is an integral transformation of a function $f(t)$ from the time domain into the complex frequency domain, giving $F(s)$.

Automatic control system


Defination of Laplace Transform

Determine the Laplace transform of each of the following functions:

(a) $u(t)$, (b) $e^{-at}u(t)$, $a \geq 0$, and (c) $\delta(t)$.

a) Step function

$$\mathcal{L}[f(t)] = F(s) = \int_{0^-}^{\infty} f(t)e^{-st} dt$$

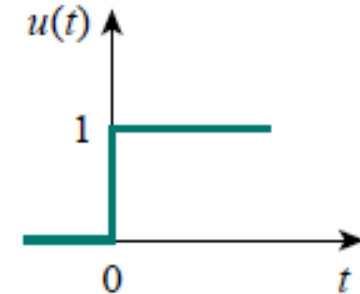

$$\mathcal{L}[u(t)] = \int_{0^-}^{\infty} 1e^{-st} dt = -\frac{1}{s}e^{-st} \Big|_0^{\infty} = -\frac{1}{s}(0) + \frac{1}{s}(1) = \frac{1}{s}$$


Automatic control system

Defination of Laplace Transform

b) Impulse function

$$\mathcal{L}[\delta(t)] = \int_{0^-}^{\infty} \delta(t) e^{-st} dt$$


$$= e^{-0} = 1$$

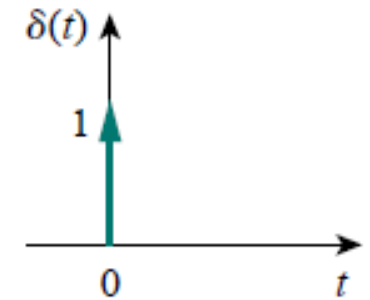

c) Exponential function

$$\mathcal{L}[e^{-at}u(t)] = \int_{0^-}^{\infty} e^{-at} e^{-st} dt$$

$$= -\frac{1}{s+a} e^{-(s+a)t} \Big|_0^{\infty} = \frac{1}{s+a}$$

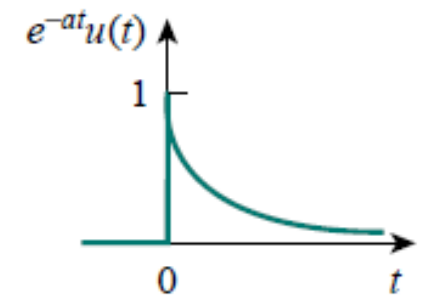

Automatic control system

Defination of Laplace Transform

Example

Determine the Laplace transform of $f(t) = \sin \omega t u(t)$.

Solution

$$\begin{aligned} F(s) &= \mathcal{L}[\sin \omega t] = \int_0^{\infty} \underbrace{(\sin \omega t)} e^{-st} dt \\ &= \int_0^{\infty} \left(\frac{e^{j\omega t} - e^{-j\omega t}}{2j} \right) e^{-st} dt \\ &= \frac{1}{2j} \int_0^{\infty} (e^{-(s-j\omega)t} - e^{-(s+j\omega)t}) dt = \frac{1}{2j} \left(\frac{1}{s-j\omega} - \frac{1}{s+j\omega} \right) = \frac{\omega}{s^2 + \omega^2} \end{aligned}$$

Automatic control system

Properties of Laplace Transform

Example

Determine the Laplace transform of $f(t) = \sin \omega t u(t)$.

Solution

$$\begin{aligned} F(s) &= \mathcal{L}[\sin \omega t] = \int_0^{\infty} \underbrace{(\sin \omega t)} e^{-st} dt \\ &= \int_0^{\infty} \left(\frac{e^{j\omega t} - e^{-j\omega t}}{2j} \right) e^{-st} dt \\ &= \frac{1}{2j} \int_0^{\infty} (e^{-(s-j\omega)t} - e^{-(s+j\omega)t}) dt = \frac{1}{2j} \left(\frac{1}{s-j\omega} - \frac{1}{s+j\omega} \right) = \frac{\omega}{s^2 + \omega^2} \end{aligned}$$

Automatic control system

Properties of Laplace Transform

Time Shift

If $F(s)$ is the Laplace transform of $f(t)$, then

$$\mathcal{L}[f(t-a)u(t-a)] = \int_0^{\infty} f(t-a)u(t-a)e^{-st} dt$$

$a \geq 0$

$$\left\{ \begin{array}{ll} u(t-a) = 0 & t < a \\ u(t-a) = 1 & t > a \end{array} \right.$$

Automatic control system

Properties of Laplace Transform

Time Shift

$$\mathcal{L}[f(t-a)u(t-a)] = \int_a^{\infty} f(t-a)e^{-st} dt$$

If we let $x = t - a$, then $dx = dt$ and $t = x + a$.

$$\begin{aligned}\mathcal{L}[f(t-a)u(t-a)] &= \int_0^{\infty} f(x)e^{-s(x+a)} dx \\ &= e^{-as} \int_0^{\infty} f(x)e^{-sx} dx \\ &= e^{-as} F(s)\end{aligned}$$

$$\mathcal{L}[f(t-a)u(t-a)] = e^{-as} F(s)$$

Automatic control system

Properties of Laplace Transform

Time Differentiation

$$\mathcal{L}\left[\frac{df}{dt}\right] = \int_{0^-}^{\infty} \frac{df}{dt} e^{-st} dt$$

$$\mathcal{L}[f'(t)] = sF(s) - f(0^-)$$

Automatic control system

Properties of Laplace Transform

Time Differentiation

$$\mathcal{L} \left[\frac{d^2 f}{dt^2} \right] = s^2 F(s) - sf(0^-) - f'(0^-)$$

$$\mathcal{L} \left[\frac{d^n f}{dt^n} \right] = s^n F(s) - s^{n-1} f(0^-) \\ - s^{n-2} f'(0^-) - \dots - s^0 f^{(n-1)}(0^-)$$

Automatic control system

Properties of Laplace Transform

Time Integration

$$\mathcal{L} \left[\int_0^t f(t) dt \right] = \int_{0^-}^{\infty} \left[\int_0^t f(x) dx \right] e^{-st} dt$$

$$\mathcal{L} \left[\int_0^t f(t) dt \right] = \frac{1}{s} F(s)$$

Automatic control system

Properties of Laplace Transform

Time Integration

As an example, if we let $f(t) = u(t)$, $F(s) = 1/s$

$$\mathcal{L}\left[\int_0^t f(t) dt\right] = \mathcal{L}[t] = \frac{1}{s} \left(\frac{1}{s}\right)$$

$$\mathcal{L}\left[\int_0^t t dt\right] = \mathcal{L}\left[\frac{t^2}{2}\right] = \frac{1}{s} \frac{1}{s^2}$$

$$\mathcal{L}[t] = \frac{1}{s^2}$$

$$\mathcal{L}[t^2] = \frac{2}{s^3}$$

$$\mathcal{L}[t^n] = \frac{n!}{s^{n+1}}$$

Automatic control system

Properties of Laplace Transform

Initial and Final Values

$$f(0^+) = \lim_{s \rightarrow \infty} sF(s)$$

For an example;

$$f(t) = e^{-2t} \cos 10t$$



$$F(s) = \frac{s + 2}{(s + 2)^2 + 10^2}$$

Then;

$$f(0^+) = \lim_{s \rightarrow \infty} sF(s) = \lim_{s \rightarrow \infty} \frac{s^2 + 2s}{s^2 + 4s + 104}$$

$$= \lim_{s \rightarrow \infty} \frac{1 + 2/s}{1 + 4/s + 104/s^2} = 1$$

Laplace transform

Functions

- Substitutes relatively more easily solved algebraic equations for relatively more difficult to solve differential equations

TIME DOMAIN		FREQUENCY DOMAIN
$\delta(t)$	unit impulse	1
A	step	$\frac{A}{s}$
t	ramp	$\frac{1}{s^2}$
t^2		$\frac{2}{s^3}$
$t^n, n > 0$		$\frac{n!}{s^{n+1}}$
e^{-at}	exponential decay	$\frac{1}{s+a}$
$\sin(\omega t)$		$\frac{\omega}{s^2 + \omega^2}$
$\cos(\omega t)$		$\frac{s}{s^2 + \omega^2}$
$t e^{-at}$		$\frac{1}{(s+a)^2}$
$t^2 e^{-at}$		$\frac{2!}{(s+a)^3}$

Model Examples

- Car parking



Model Examples

- HVAC system

