

Impact Assessment of Offshore Pile Driving Noise on Red Sea Marine Mammals

Waled A. Dawoud, Abdelazim M. Negm, Nasser M. Saleh, and Mahmoud F. Bady

Abstract—Red Sea is one of the most important repositories of the marine biodiversity in the world. Red Sea oil and gas reserves are estimated to be around 100 billion barrel of oil equivalent necessitate the use of offshore structure to extract it. Most of offshore drilling rigs and production platforms are found on group of large diameter piles which are driving into sea bed producing high amount of underwater noise. Underwater noise emitted during pile construction can mask biologically relevant signals for marine mammals. This noise might lead to behavioral reactions, harassment, and at very high levels can injure or even kill the mammal. Range-dependent Acoustic Model, Rogers Model, was used to assess underwater noise propagation of offshore pile driving taking into account seabed bathymetry, temperature, and salinity. It was found that an offshore pile driven with 235 kJ rated energy diesel hammer can cause behavioral disturbance to the marine mammal within a distance of 1000 m from the pile location; temporary threshold shift within a distance of 30 m; permanent threshold shift within a distance of 50 m; and injury, or even death, within a distance of 20 m.

Index Terms—Red sea marine mammals, pile driving noise, underwater noise propagation, threshold levels, rogers model.

I. INTRODUCTION

Red Sea is one of the most important repositories of the marine biodiversity in the world, it support populations for many species of marine mammals (about 15 species of dolphins and whales, and one dugong species). Red Sea Governorate tourism industry, which depends mainly on marine wildlife and recreation tourism, contributed significantly to the Egyptian economy in 2003 to reach about 10% of GDP and 4% of total employment [1]. At the same time, Red Sea oil and gas reserves are estimated to be around 100 billion barrel of oil equivalent. Kingdom of Saudi Arabia is planning to employ 200 drilling rigs in 2014 most of it will be in the Red Sea [2] which, in the absence of proper environmental studies, will affect significantly the Red-Sea eco-system.

Manuscript received October 30, 2014; revised April 28, 2015. This work was supported by Egyptian Ministry of Higher Education (MoHE) as a Ph.D. scholarship.

W. A. Dawoud is with Environmental Engineering Department, School of Energy and Environmental Engineering, Egypt-Japan University of Science and Technology (E-JUST), New Borg Al-Arab City, Postal Code 21934, Alexandria, Egypt (e-mail: walid.dawoud@ejust.edu.eg).

A. M. Negm is with Environmental Engineering Department, School of Energy and Environmental Engineering, E-JUST, Seconded from Zagazig University, Egypt (e-mail: negm@ejust.edu.eg, amnegm85@yahoo.com).

N. M. Saleh is with Faculty of Engineering at Shoubra, Benha University, Egypt (e-mail: na_sa_64@hotmail.com).

M. F. Bady is with Environmental Engineering Department, School of Energy and Environmental Engineering, E-JUST, Seconded from Assiut University, Egypt (e-mail: mahmoud.bady@ejust.edu.eg).

Most of offshore drilling rigs and production platforms are found on group of large diameter piles which are driving into sea bed. During pile driving; extremely high sound levels are produced in both the surrounding air and underwater environment. In terms of the underwater environment, field observations show peak acoustic pressures of 1.0 kPa measured at a range of 3000 m [3], around 10 kPa measured at a range of 60 m [4], and around 100 kPa measured at a range of 10 m [5] from the pile driving operation. Such pressures are known to produce deleterious effects on both fish and marine mammals [6].

Underwater noise effects on marine mammals are of particular interest because marine mammals has a wide distribution area in the coastal waters of the Red Sea, acute hearing, and functional hearing over a very wide frequency range [7]-[10]. Marine mammals are relatively easily deterred by anthropogenic underwater noises [11]. Avoidance threshold levels of harbor porpoises have been determined for noise bands and tonal signals around 12 kHz, a continuous 50 kHz tone, and continuous and pulsed 70 and 120 kHz tones [12]. Reference [11] studied the effects of underwater noise on marine mammals from driving 4.0m diameter steel mono-pile foundations for offshore wind turbines in the North Sea (Source Level 235 dB re 1 μ Pap-p at 1 m), by quantifying their echo-location activity. Reduced echo-location activity occurred at over 21.0 km from the pile driving site. Reference [13] reported that offshore pile driving sounds reduced detected marine mammals acoustic signals at distances of up to 18 km from the sound source. Based on visual surveys and static acoustic monitoring; reference [14] reported strong avoidance within 20 km, reduced echo-location at distances less than 11 km, and increased detection rates at 25 and 50 km from the pile driving source.

Although the importance of Red Sea biodiversity to the Egyptian economy and the world ecosystem; no attempt has been made to investigate the propagation of underwater noise and its effects on Red Sea ecosystem. The goal of the present study is to assess the effects and extends of offshore pile driving noise on marine mammals in the Red Sea taking into account sea bottom bathymetry, temperature, and salinity using range-dependent underwater propagation empirical model (Rogers Model).

II. RED SEA ECOSYSTEM

Red Sea marine ecosystem is considered tropical and semi-enclosed extending from Suez and Aqaba gulf in the north to the strait of Bab-Elmandeb in the south with width ranges from 30 to 280 km as shown in Fig. 1. Red Sea is considered an environmentally unique area in terms of circulation, temperature and salinity with warm clear waters

and a complex reef ecosystem which provides habitats for a wide range of marine species. There are over 1100 species of fish (whereof about 40 are endemic). There are more than 200 species of corals, species, 125 of which are soft corals, 40 species of star fish, 25 species of sea urchins, more than a 100 species of mollusks and 150 species of crustaceans in the Red Sea [15].

Red Sea support populations for about 15 species of dolphins and whales, and one dugong species [16]. Seven mammal species have been resident for a long time: the Bottlenose Dolphin, Bryde's Whale, Indopacific Bottlenose Dolphin, Pantropical Spotted Dolphin, Longbeaked Common Dolphin, Risso's Dolphin and the Spinner Dolphin. Recently Humpback Dolphins, whose normal habitat is the east coast of Africa, have also been seen in the Red Sea [17].



Fig. 1. The Red Sea [18].

III. UNDERWATER NOISE

A. Pile Driving Underwater Noise

Four types of mechanical waves are produced during pile driving namely: Compressional, Shear, Rayleigh, and Love waves. Only compressional waves need to be considered when studying noise effects on marine mammals because its ability to travel in water [19]. Based on generation conditions; sound waves can be divided into plane and spherical waves. In ideal medium; plane waves can propagate with no energy loss in contrast to spherical waves which follow spherical law energy decay.

Sound waves propagation in water differs than in air in many aspects; Sound waves in water have a pressure 60 times larger (and a displacement amplitude 60 times less) than that in the air because of the difference in acoustic impedance. Also the air/water interface acts as sound reflector (Lloyd's mirror) therefore sound generated underwater waves will not pass over the air and it will be reflected with an opposite polarity.

B. Underwater Sound Propagation Models

The understanding of underwater sound propagation is the key to understand and predict all other underwater acoustic phenomena. Different sound propagation models were developed since the World War II [20] which can be divided, based on its theoretical approach, as in Fig. 2.

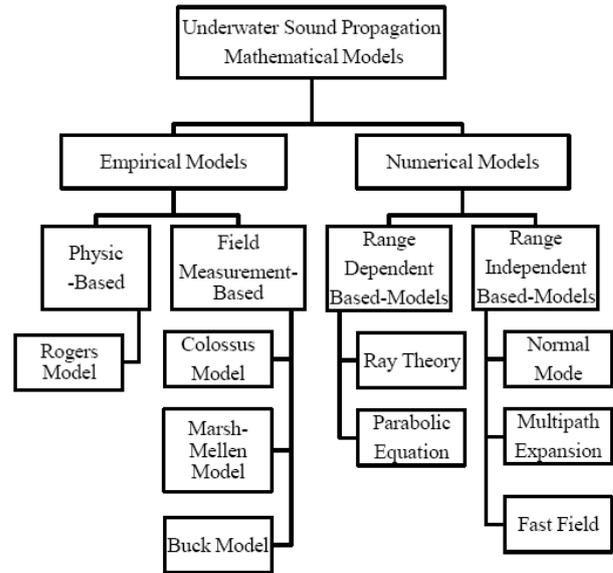


Fig. 2. Underwater sound propagation mathematical models.

Any sound propagation model should take into account transmission losses (TL) of sound waves. The decay rate of sound waves propagate underwater depends mainly on sound frequency, sound source depth, water temperature, water salinity, water depth, and sea bed conditions. The use of sophisticated models may lead to misleading results due to limited knowledge of subsurface conditions. Simplified empirical models can give a better estimate of the variation in sound wave with distance which is enough for the preliminary assessment of the pile driving noise impacts on marine mammals.

C. Rogers Model

Rogers model was used to predict transmission losses of underwater sound waves since 1981 [20]. The model was derived bases on theoretical approach (physics-based) assuming that all shallow water transmission losses, for negative sound speed gradient, can be described by the following equation:

$$TL = 15 \log_{10}^R + 5 \log_{10}^{(H\beta)} + \frac{\beta R \theta_L^2}{4H} + \alpha_w R - 7.18 \quad (1)$$

where R is the range (m), H the water depth (m), β the bottom loss (dB rad⁻¹), θ_L the limiting angle (rad), and α_w the absorption coefficient of sea water.

The bottom loss (β dB rad⁻¹) can be approximated, for small limiting angles (θ_L), as follows:

$$\beta \approx \frac{0.477 M_0 N_0 K_s}{[1 - N_0^2]^{3/2}} \quad (2)$$

where $N_0 = c_w/c_s$, c_w is the maximum (sea surface) sound speed (ms^{-1}) and c_s is the sound speed (ms^{-1}) in the sediments; $M_0 = \rho_s/\rho_w$, ρ_w is the density of sea water and ρ_s is the sediment density and K_s the sediment attenuation coefficient ($\text{dBm}^{-1} \text{kHz}^{-1}$).

Numerous empirical methods, based on laboratory and field measurements, were developed to predict sound speed in water. A simplified formula was given in [21] as follows:

$$C = 1449.2 + 4.6T - 0.055T^2 + 0.00029T^3 + (1.34 - 0.01T)(S - 35) + 0.016H \quad (3)$$

where T is the temperature ($^{\circ}\text{C}$), S is the salinity (PPT), and H is the depth (m).

The limiting angles (θ_l) is the larger of the maximum grazing angle for a skip distance (θ_g) and the effective plane-wave angle corresponding to the lowest propagating mode (θ_c) as follows:

$$\theta_g = \sqrt{\frac{2Hg}{c_w}} \text{ (rad)} \quad (4)$$

$$\theta_c = \frac{c_w}{2fH} \text{ (rad)} \quad (5)$$

where g is the magnitude of the negative sound-speed gradient (s^{-1}), and f is the frequency (Hz).

D. Noise Effects on Marine Mammals

The potential for underwater noise to affect marine mammals depends on how well the animal can hear the noise. Noises which can't be heard by the mammal are less likely to disturb or injure them except when it is associated with high sound pressure that can causes physical injury [22]. Marine mammals can be divided based on its functional hearing to the groups shown in Table I [22]:

TABLE I: FUNCTIONAL HEARING GROUPS

Functional hearing group	Estimated auditory bandwidth (kHz)
Low-frequency cetaceans	0.007 - 22
Mid-frequency cetaceans	0.150 - 160
High-frequency cetaceans	0.200 - 180
Pinnipeds in water	0.075 - 75
Pinnipeds in air	0.075 - 30

Marine mammals have different hearing at different frequencies within their functional hearing range; frequency weighting is used to quantitatively compensating for the difference in frequency response based on mammal's audiograms [23]. Two metrics are commonly used to describe sound parameters: sound pressure level (SPL) and sound exposure level (SEL). SPL is the maximum sound pressure at any given moment produced by a particular activity measured in dB re: $1 \mu\text{Pa}$. SEL is a measure of energy exposure level measured in dB re: $1 \mu\text{Pa}^2\text{s}$. The main difference between these two parameters is that SPL can be an instantaneous value and SEL is the total noise energy to which the mammal is exposed during a given duration, typically one second for pulse sources [24]. Because pile

driving is an ongoing impulsive activity that will occur throughout the construction phase; sound exposure level shall be used.

To assess the impact of underwater noise on Red Sea marine mammals, the marine mammals shall be divided into three main categories; Dolphins Whales, and Dugongs. The SEL threshold levels (in dB re: $1 \mu\text{Pa}^2\text{s}$) and SPL (in dB re: $1 \mu\text{Pa}$) for these categories are shown in Table II [23]:

TABLE II: ESTIMATED IMPACT SEL AND SPL REGULATORY THRESHOLDS

Methodology	Death/ Injury (SPL)	Permanent Threshold Shift (SEL)	Temporary Threshold Shift (SEL)	Behavioral Response (SEL)
Dolphins	>200	> 178-198	> 183	> 120-150
Whales	>200	> 178-198	> 183	> 120-180
Dugongs	>200	> 178-198	> 183	> 120-150

IV. MATERIALS AND METHOD

A. Assessment Procedure

The following procedures were used to assess the impact of pile driving noise on marine mammals in the red sea. The procedures given in Fig. 3 can be used at any location in the red sea with any pile configuration.

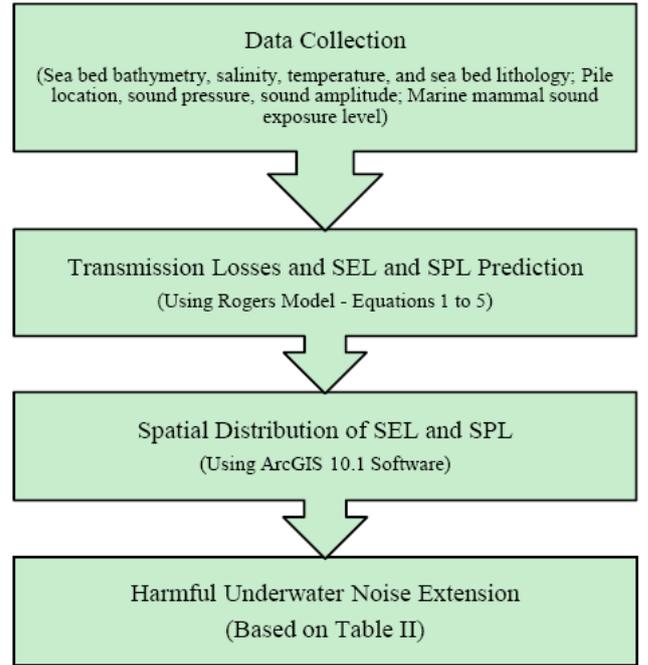


Fig. 3. Assessment procedure.

B. Red Sea Bathymetry, Salinity, and Temperature Profile

The red sea bathymetry was attained from National Oceanic and Atmospheric administration [25] with 4 km resolution. The data then gradually resampled into a maximum resolution of 100 m around the pile location using beam bathymetry survey data attained from [26] as shown in Fig. 4. An area around the pile location $18 \times 18 \text{ km}^2$ was then resampled into 10.0 m resolution using Natural-Neighbor interpolation.

The salinity and temperature data in Red Sea were extracted from National Oceanic and Atmospheric administration [25] location of the observation stations is shown in Fig. 5a). Using the salinity and temperature

observations data; salinity and temperature profiles were created as shown in Fig. 5b) and Fig. 5c).

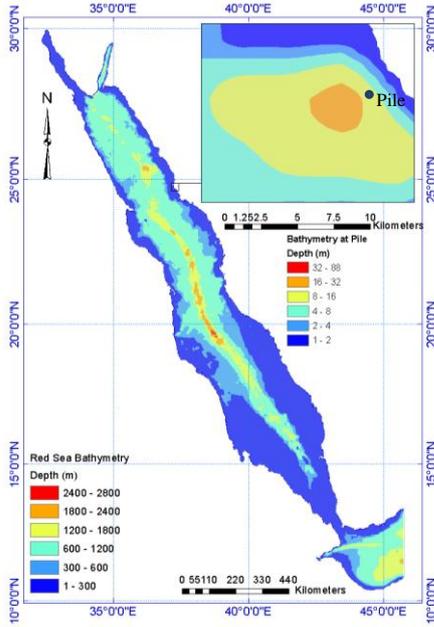


Fig. 4. Red Sea bathymetry.

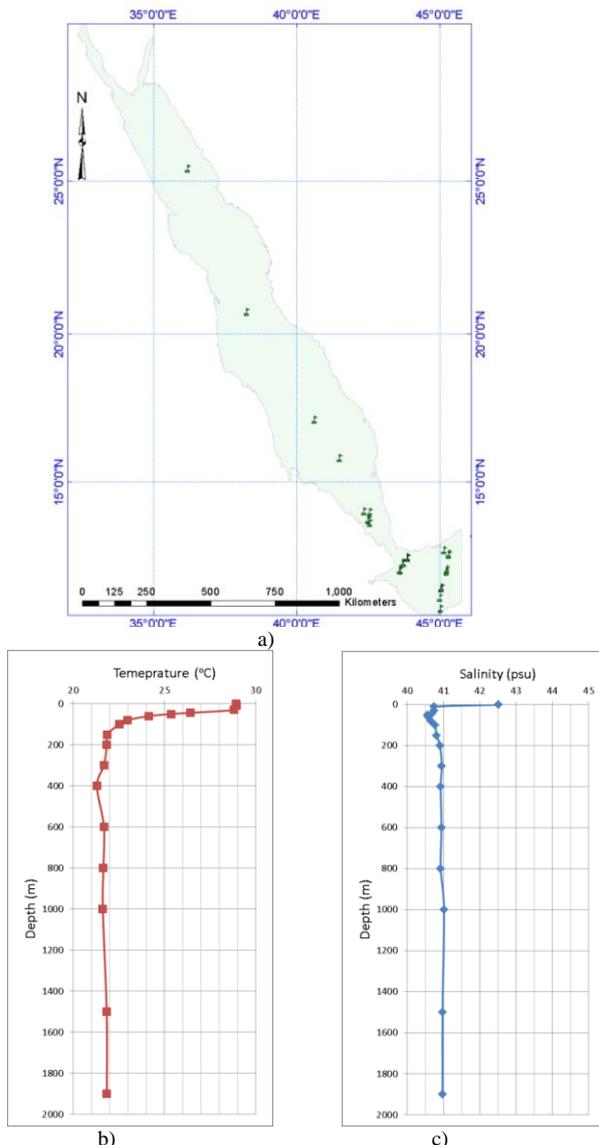


Fig. 5. a) Observation stations, b) Temperature profile, and c) Salinity profile.

C. Pile Characteristics

The study was made to be consistent with one of the 136 piles constructed to support ship repair yard along Jeddah coast, Saudi Arabia [27]; a hollow steel pile, approximately 96 m long with 1.40m diameter and wall thickness of 1.9 cm. The pile was driven approximately 80 m into the sediment in water 16.0 m deep [28]. The piles were driven with a Kobe-80 Diesel Hammer with ram weight of 78.5 kN and energy of 235 kJ. No cushion between the ram and pile was used. The sound source level from the 235 kJ hammer was predicted by assuming the underwater noise output of a pile strike is proportional to the energy delivered to the pile as in (6):

$$\Delta B_0 = 10 \log_{10} \left(\frac{E}{E_r} \right) \quad (6)$$

The reference sound source level was for the 49 kJ diesel hammer proposed in [23]. Table III shows the reference source levels and the predicted source levels for the 235 kJ hammer.

TABLE III: REFERENCE AND PREDICTED SOURCE LEVELS (AT 1.0 M)

Hammer Energy	SEL (dB re 1μPa ² .s)	SPL (dB re 1μPa)
49 kJ	199	213
235 kJ	205.8	219.8

D. Sea Bed Lithology

The sea bed lithological profile near the studied site reveal that it contains mainly from the following geologic units [28]:

- 1) Heterogeneous surface layer consists of coral, coral debris, clays, sands and silts formed during the Pleistocene till present.
- 2) Gravels and sands of igneous origin formed during the Pleistocene.
- 3) Siltstone, clays, claystone, limestone, gypsum formed during the Pliocene.

Fig. 6 shows the generalized geologic cross-section as given by [28].

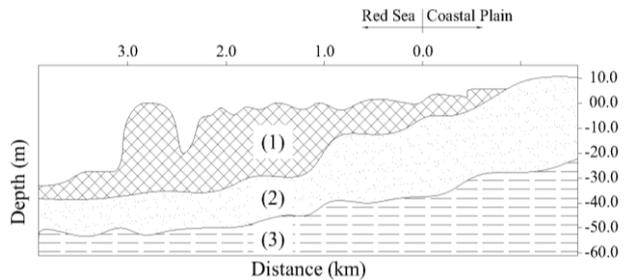


Fig. 6. Geological cross-section near the site, reproduced from [28].

E. SEL and SPL Prediction

The transmission losses (TL) were calculated at each point using equations 1 to 5. SEL and SPL are then calculated using the following formula:

$$SEL_i = SEL_o - TL_i \quad (7)$$

$$SPL_i = SPL_o - TL_i \quad (8)$$

where SEL_i is the sound exposure level at point i , SEL_o is the

sound exposure level at source, SPL_i is the sound pressure level at point i , SPL_o is the sound pressure level at source, and TL_i is the transmission losses at point i .

V. RESULTS

The spatial distribution of the predicted sound exposure level (SEL) produced from driving the pile with a diesel hammer of 245 kJ rated energy is shown in Fig. 7. The SEL spatial distribution reveals that the underwater noise can propagate, with amplitude that can cause harm to the marine mammals, to a distance up to 1000 m.

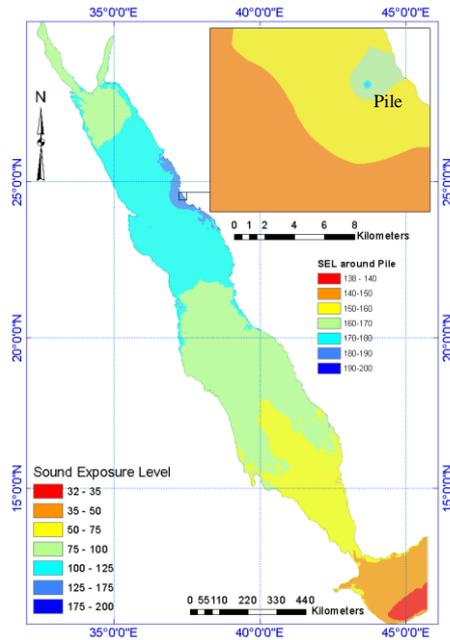


Fig. 7. Predicted SEL fields.

Fig. 8 shows the predicted sound pressure level (SPL) propagation around the pile location which shows that the marine mammal can be injured, or even killed, within a distance of 20.0 m.

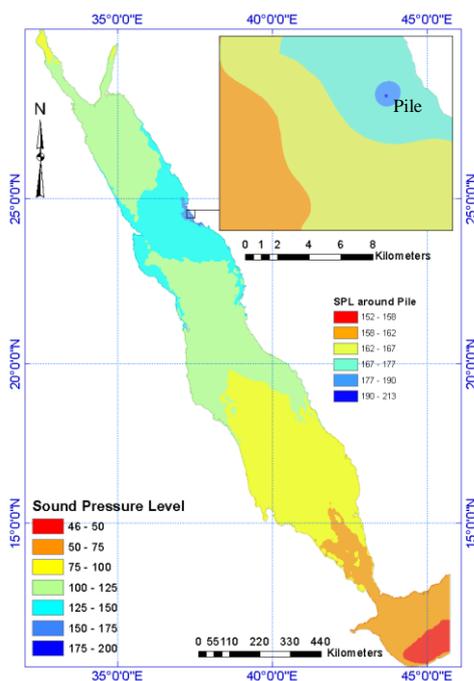


Fig. 8. Predicted SPL fields.

VI. CONCLUSION

Range-dependent acoustic model, Rogers Model, was used to assess underwater noise propagation of 96 m offshore pile driven with Kobe-80 diesel hammer and constructed near Jeddah Coast, Saudi Arabia. Red Sea bathymetry, temperature, and salinity were taken into account in the model and it was found that:

- 1) The effect of sea water temperature and salinity has negligible effect on underwater sound propagation (<0.01 %).
- 2) The effect of red sea bathymetry has a minor effect on underwater sound propagation (1.1%).

Pile with SEL 205.8 (dB re $1\mu\text{Pa}^2\cdot\text{s}$) and SPL of 219.8 (dB re $1\mu\text{Pa}$) can cause the following

- 1) Behavioral disturbance to the marine mammal within a distance of 1000 m from the pile location.
- 2) Temporary threshold shift within a distance of 30.0m
- 3) Permanent threshold shift within a distance of 50.0 m.
- 4) Injury, or even death, within a distance of 20.0 m.

ACKNOWLEDGMENT

W. A. Dawoudis thankful to the Egyptian Ministry of Higher Education (MoHE) for funding his PhD studies. Also great thanking is due to Egypt-Japan University of Science and Technology (E-JUST) for offering the tools and equipment needed for the research.

REFERENCES

- [1] G. Notarbartolo-di-Sciara, M. H. Hanafy, M. M. Fouda, A. Afifi, and M. Costa, "Spinner dolphin (*Stenella longirostris*) resting habitat in Samadai Reef (Egypt, Red Sea) protected through tourism management," *J. Mar. Biol. Assoc. United Kingdom*, vol. 89, no. 1, pp. 211–216, 2009.
- [2] Oil service firms rush to Saudi for busy drilling year ahead. Reuters. (2014). [Online]. Available: <http://uk.reuters.com/article/2013/10/27/aramco-rigs-idUKL5N0IF0V T20131027>
- [3] C. A. Jong and M. A. Ainslie, "Underwater radiated noise due to the piling for the Q7 offshore wind park," *J. Acoust. Soc. Am.*, vol. 123, no. 5, p. 2987, 2008.
- [4] S. P. Robinson, P. A. Lepper, and J. Ablitt, "The measurement of the underwater radiated noise from marine piling including characterisation of a 'soft start' period," *OCEANS 2007 - Europe*, 2007, pp. 1–6.
- [5] P. Dahl, "An investigation of underwater sound propagation from pile driving," *Wsdot. Wa. Gov.*, 2011.
- [6] P. T. Madsen, M. Wahlberg, J. Tougaard, K. Lucke, and P. Tyack, "Wind turbine underwater noise and marine mammals: implications of current knowledge and data needs," *Mar. Ecol. Prog. Ser.*, vol. 309, pp. 279–295, Mar. 2006.
- [7] R. A. Kastelein, P. Bunscoek, M. Hagedoorn, W. W. L. Au, and D. Haan, "Audiogram of a harbor porpoise (*Phocoena phocoena*) measured with narrow-band frequency-modulated signals," *J. Acoust. Soc. Am.*, vol. 112, no. 1, p. 334, 2002.
- [8] R. A. Kastelein, P. J. Wensveen, L. Hoek, W. W. L. Au, J. M. Terhune, and C. A. F. Jong, "Critical ratios in harbor porpoises (*Phocoena phocoena*) for tonal signals between 0.315 and 150 kHz in random Gaussian white noise," *J. Acoust. Soc. Am.*, vol. 126, no. 3, p. 1588, Sep. 2009.
- [9] R. A. Kastelein, L. Hoek, C. A. F. de Jong, and P. J. Wensveen, "The effect of signal duration on the underwater detection thresholds of a harbor porpoise (*Phocoena phocoena*) for single frequency-modulated tonal signals between 0.25 and 160 kHz," *J. Acoust. Soc. Am.*, vol. 128, no. 5, pp. 3211–22, Nov. 2010.
- [10] R. A. Kastelein, N. Steen, C. Jong, P. J. Wensveen, and W. C. Verboom, "Effect of broadband-noise masking on the behavioral response of a harbor porpoise (*Phocoena phocoena*) to 1-s duration 6-7 kHz sonar up-sweeps," *J. Acoust. Soc. Am.*, vol. 129, no. 4, pp. 2307–15, Apr. 2011.

- [11] J. Tougaard, J. Carstensen, J. Teilmann, H. Skov, and P. Rasmussen, "Pile driving zone of responsiveness extends beyond 20 km for harbor porpoises (*Phocoena phocoena* (L.)),” *J. Acoust. Soc. Am.*, vol. 126, no. 1, pp. 11–4, Jul. 2009.
- [12] J. Carstensen, O. D. Henriksen, and J. Teilmann, "Impacts of offshore wind farm construction on harbour porpoises: acoustic monitoring of echolocation activity using porpoise detectors (T-PODs),” *Mar. Ecol. Prog. Ser.*, vol. 321, pp. 295–308, 2006.
- [13] M. J. Brandt, A. Diederichs, K. Betke, and G. Nehls, "Responses of harbour porpoises to pile driving at the Horns Rev II offshore wind farm in the Danish North Sea,” *Mar. Ecol. Prog. Ser.*, vol. 421, pp. 205–216, 2011.
- [14] M. Dähne, A. Gilles, K. Lucke, V. Peschko, S. Adler, K. Krügel, J. Sundermeyer, and U. Siebert, "Effects of pile-driving on harbour porpoises (*Phocoena phocoena*) at the first offshore wind farm in Germany,” *Environ. Res. Lett.*, vol. 8, no. 2, p. 25002, 2013.
- [15] (2014). Red sea marine life. [Online]. Available: <http://www.aziab.com/red-sea-marine-life.htm>
- [16] M. Sarhan, M. Hanafy, and M. Fouda, "Economics and sustainable use of samadai reef 'Dolphin House', Marsa Alam, Red Sea, Egypt,” presented at Sixth International Bioecon Conference on Economics and the Analysis of Biology and Biodiversity, 2004.
- [17] (2014). Marsa Alam Dolphins. [Online]. Available: http://www.marsaalam.com/Marsa_Alam_Dolphins.html
- [18] (2014). Red Sea topographic map. [Online]. Available: http://upload.wikimedia.org/wikipedia/commons/1/19/Red_Sea_topographic_map-en.jpg
- [19] G. Producers *et al.*, "Fundamentals of underwater sound,” 2008.
- [20] P. C. Etter, *Underwater Acoustic Modeling and Simulation*, Abingdon, UK: Taylor & Francis, 2003.
- [21] H. Medwin and C. Clay, *Fundamentals of Acoustical Oceanography*, 1998.
- [22] B. Southall, A. Bowles, and W. Ellison, "Marine mammal noise-exposure criteria: initial scientific recommendations,” *Bioacoustics*, vol. 33, no. 4, 2008.
- [23] P. Hedland, C. P. S. Kent, R. D. Mccauley, and A. J. Duncan, "Environmental impacts of underwater noise associated with harbour works,” 2009.
- [24] P. Theobald and P. Lepper, "Cumulative noise exposure assessment for marine mammals using sound exposure level as a metric,” 2009.
- [25] N. G. D. Center, Multibeam Bathymetric Data | ngdc.noaa.gov.
- [26] Marine Environmental Data. (2014). [Online]. Available: <http://www.niwa.co.nz/our-science/oceans/bathymetry/download-the-data>
- [27] W. Akili, "Driven pile foundation in coral sand, Jeddah, Saudi Arabia,” in *Proc. Int. Conf. Case Hist.*, no. 6, 1988.
- [28] W. Akili, "Pile driving in coral deposits: A case study along the Red Sea,” *Geotech. Spec. Publ.*, pp. 604–618, 2002.



Waled A. Dawoud is a PhD student in Environmental Engineering Department, Egypt Japan University of Science and Technology. He was graduated from Faculty of Engineering at Shoubra, 2004 and from there he took his M.Sc. in geotechnical Engineering. Through his master degree preparation period; he has gained good knowledge in different aspects of modelling ground water flow and underground structures using the

finite element, finite difference, and boundary elements methods.

Through his major work in analysis and design of Mega Projects in Middle East, he obtained solid training in research, writing, and analysis. His main career interest lies in the analysis, and design of underground structures, marine structures, water and waste-water plants, and barrages. He has a good knowledge with programming languages like VB.net, Visual C++, C#, and VBA in both Excel and AutoCAD. During his work, he gained a good experience in most of groundwater flow and geotechnical software.

Mr. Dawoud is a member in Egyptian Tunneling Society, Egyptian Soil Mechanics Society, and Egyptian Engineers Syndicate.



Abdelazim Negm was born in Sharkia, Egypt on April 16, 1962. He graduated in May 1985 from Zagazig University, Zagazig, Egypt and was awarded the B.Sc. degree in irrigation and environmental engineering with average grade very good with honors, with 84.5%. Negm has been awarded the degree of master of science (M.Sc.) in civil engineering (irrigation and hydraulics) from Ain Shams University, Egypt and the PhD degree in hydraulics in 1992 from Zagazig University.

Currently, he is a professor of water resources in Egypt-Japan University for Science and Technology (E-JUST) since Oct. 1st, 2012 and the chairman of the Environmental Engineering Dept. at E-JUST since Feb. 17th, 2013. He worked as a demonstrator in the Faculty of Engineering, Zagazig University in 1986 and continued till he occupied the position of vice dean for Academic and Student Affairs. He published about 220 papers in national and international Journals and conferences. He has awarded the prizes of best papers three times. His research areas include hydraulic, hydrology and water resources. Currently, he is very interested in the sustainability and green environment.

Prof. Negm is a member of IAHR and a member of the Egyptian permanent promotion committee for professorship promotion in field of water resources. He is a member of the editorial board of several scientific journals and a member of the organizing committee of IWTC18 and he is the secretary general of the conference as well.



Mahmoud Bady was born in Assiut, Egypt on September 17, 1973 and graduated in June 1996 from Assiut University. He worked as a demonstrator in the Mechanical Engineering Department, Assiut University in 1996 and continued till he got the MSc degree in internal combustion engines in May 2002. Then he got his PhD in the field of air pollution modeling and control from University of Tokyo, Japan in September 2008. Currently, he is an assistant professor in Egypt-Japan University of Science and Technology (E-JUST) since September, 2011. He published about papers in national and international Journals and conferences in addition to three book chapters. He participated in more than 24 conferences. His research areas include air quality modeling, reverse simulation, wind energy, and meteorology. Dr. Bady is a member of famous academic organizations such as the Japanese Society of Heating, Air Conditioning and Sanitary Engineers (SHASE) and the Architecture Institute of Japan (AIJ).