



- 1- **Define** the meaning of the electric field and **discuss** the various types of electric field according to the electrode configuration.
- 2- **Mention** the various methods for electric field computation and discuss the importance of electric field computation.
- 3- **Discuss** briefly the algorithm of electric field calculation using the charge simulation method.
- 4- **Mention** the different applications in which electric field computation is important.
- 5- Consider two concentric spheres form a capacitor as apart from GIS; the inner and outer radii are r and R respectively, the potential upon the inner sphere is V .
 - a) **State** the expression for the electric field and the potential at any radius x and then draw them with radius x .
 - b) **Derive** the expressions for the maximum value and minimum value of electric field.
 - c) **Derive** the field enhancement factor.
 - d) **Derive** the inner radius of the inner sphere at which E_{max} has a minimum value.
 - e) **Derive** the capacitance of the concentric sphere.
- 6- Consider a pair of coaxial cylindrical electrodes as apart from GIS, the potential upon the inner electrode is V , the inner electrode radius is r where the outer radius of the enclosure is R , the length of the cylinder is L .
 - a) **State** the expression for the electric field and the potential at any radius x and then draw them with radius x .
 - b) **Derive** the expressions for the maximum value and minimum value of electric field.
 - c) **Derive** the field enhancement factor.
 - d) **Derive** the optimal radius of the inner electrode at which E_{max} has a minimum value.
 - e) **Derive** the capacitance of the coaxial cylindrical electrodes.
- 7- Using the charge simulation technique, calculate the potential and field around a hemi spherically capped cylindrical rod stressed with a voltage $V = 1$ kV and length of 1 m with respect to a ground plane (Fig. 1). The rod radius R is 1 cm and the gap spacing H is 1 m (state the steps and use the flowchart) then draw the profile of the result electric field components.

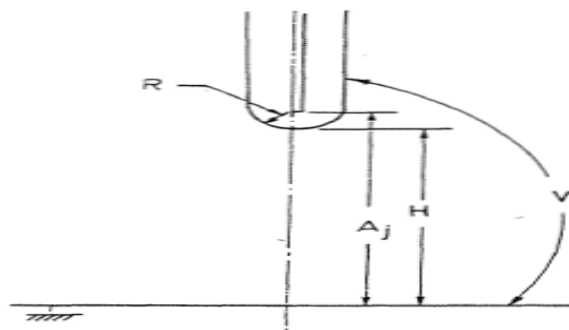


Fig. 1



- A beam of ions is injected into a gas. The beam has an initial density n_0 ions/cm³. **Find** the density of the remaining ions at a distance equal to (a) the mean free path, (b) five times the mean free path.
- In an experiment to measure α for a certain gas, it was found that the steady state current is 5.5×10^{-8} A at 8 kV at a distance of 0.4 cm between the plane electrodes. Keeping the field constant and reducing the distance to 0.1 cm results in a current of 5.5×10^{-9} A. **Calculate:**
 - Townsend's primary ionization coefficient α .
 - The number of electrons emitted from the cathode per second.
 - The electrode spacing that would result an electron avalanche of 10^2 .
- In an experiment in a certain gas it was found that the current between two Parallel plates were 1.22, 1.82 and 2.22 of the initiating photocurrent at distances 0.005, 0.01504 and 0.019 m respectively. E/P and P were maintained constant at 160 V/cm.torr, 0.1 torr respectively. **Calculate:**
 - Townsend's primary ionization coefficient α .
 - The secondary ionization coefficient γ .
 - The ionization efficiency.
 - The distance and the voltage at which transition to self sustained (breakdown) take place.
- The following table gives two sets of experimental results for studying Townsend's mechanism. E is kept constant in each set. **Determine** the values of Townsend's first and second ionization coefficients for each set.

<i>I set 30 kV/cm</i> <i>Gap distance (mm)</i>	<i>II set kV/cm</i> <i>Observed current A</i>	
	<i>I set</i>	<i>II set</i>
0.5	1.5×10^{-13}	6.5×10^{-14}
1.0	5×10^{-13}	2.0×10^{-13}
1.5	8.5×10^{-13}	4×10^{-13}
2.0	1.5×10^{-12}	8×10^{-13}
2.5	5.6×10^{-12}	1.2×10^{-12}
3.0	1.4×10^{-10}	6.5×10^{-12}
3.5	1.4×10^{-10}	6.5×10^{-11}
4.0	1.5×10^{-9}	4.0×10^{-10}
5.0	7.0×10^{-7}	1.2×10^{-8}

The minimum current observed is 6×10^{-14} A



5. The following table gives two sets of experimental results for studying Townsend's mechanism. E is kept constant in each set. **Determine** the values of Townsend's first and second ionization coefficients for each set.

Set 1:									
Gap distance (mm)	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Applied voltage V (volts)	1000	2000	3000	4000	5000	6000	7000	8000	10000
Observed current I(A)	10^{-13}	3×10^{-13}	6×10^{-13}	10^{-12}	4×10^{-12}	10^{-11}	10^{-10}	10^{-9}	5×10^{-7}
Set 2:									
V (volts)	500	1000	1500	2000	2500	3000	3500	4000	4500
I(A)	5×10^{-14}	1.5×10^{-13}	3×10^{-13}	6×10^{-13}	10^{-12}	5×10^{-12}	5×10^{-11}	3×10^{-10}	10^{-8}

The minimum current observed when 150 V was applied was 5×10^{-14} A.

6. If an electron starts at a distance of 0.5 mm in a field where $\alpha = b - ax \text{ cm}^{-1}$, where X is measured from the cathode surface in cm, **Specify** the type of this field and give the reason, **Also Find** the distance it must travel to produce an avalanche of 10^2 electrons where $a = 10 \times 10^3$ and $b = 3.5 \times 10^3$.
7. **Repeat** the above problem if an electron starts at $x = 5 \text{ mm}$.
8. For the field given in problem No.5, **Determine** the minimum distance from the anode, from which an electron start an avalanche having a total no of electrons of 10^2 .
9. For the field given in problem No.5, If $\alpha - \eta = a - b\sqrt{X} \text{ cm}^{-1}$, **Determine** the thickness of ionization zone.



1. **Calculate** the number of electrons formed in an electron avalanche which has traveled a distance of 1.5cm in the uniform field gap between two parallel plates provided that in air at the given field the values of the ionization and the attachment coefficient are $\alpha=7.4$, $\mu=5$, $\eta=2.4$ The electron avalanche has started by an electron flash of 100 electrons.
2. **Calculate** the value of secondary ionization coefficient that fulfills Townsend criterion of breakdown in a uniform gap of 2 cm width, which stressed by a uniform field corresponding to $\alpha=8$.
3. **State** Townsend criterion of breakdown in gases. In a certain gas at low pressure, if the first ionization coefficient (cm^{-1}) is related to E (volt/cm) by the expression $\alpha=(E/200)^{4.35} * 10^{-6}$ and if the second Townsend coefficient has a value of 10^{-4} , **Calculate** the electrode spacing necessary to produce breakdown and the breakdown voltage assuming that E is constant at 8 kV/cm.
4. If the breakdown voltage of two parallel plates separated by a gap of 0.1cm is 4500V, **Calculate** the total secondary coefficient of ionization γ if the gap is air at a pressure 760 torr and temperature of 25° C. Take $A=15\text{cm}^{-1}$ and $B=365$.
5. If the voltage of two parallel plates separated by air gap of 0.002 m is 9 Kv just before the transition to self sustaining current. **Calculate** The total secondary ionization coefficient γ at NTP ($P=1 \text{ atm.} = 101.3 \text{ Kpa}$). The A and B values are $11253.7 \text{ (m.Kpa)}^{-1}$, 273840 (v/m.Kpa) respectively.
6. For a certain gas the first Townsend coefficient of ionization is given by the standard equation with $A=15 \text{ (cm)}^{-1}$ and $B=365$. If the secondary ionization coefficient is equal to 10^{-4} , **Calculate** the minimum breakdown voltage and the minimum value of the pressure distance product.
7. For a certain gas, if $A=15 \text{ (cm.torr)}^{-1}$ and $B=365 \text{ (v/cm.torr)}$. E/P is kept constant to be 350 V/cm.torr and P is kept constant to be 5 torr. **Calculate:**
 - a) The First Townsend's ionization coefficient α
 - b) The mean free path λ .
 - c) The ionization potential.
 - d) The maximum ionization efficiency.
 - e) If $\gamma=10^{-4}$ calculate the minimum breakdown voltage and the corresponding value of the pressure-distance product.



8. For the current growth equation of Townsend's Criterion for breakdown in Gases with second ionization process;
- Mention** the Townsend's Criterion for breakdown in Gases?
 - What** are the drawbacks of Townsend's Criterion for breakdown in Gases?
 - Define** Townsend's first and second ionization coefficients?
 - Mention** the condition for breakdown in a Townsend discharge?
 - Define** Paschen's law for breakdown in Gases?
 - Mention** how you account the breakdown voltage as a function in " $p \times d$ "?
 - Mention** how you account the minimum voltage for breakdown under a given " $p \times d$ " condition?
9. **Write** a short notes on each of the following:
- | | |
|---|----------------------------------|
| a) Photo ionization Process. | b) Photoemission Process. |
| c) Electron attachment. | d) Self sustained discharge. |
| e) Electronegative gases. | f) Non self sustained discharge. |
| g) The various factors which affect breakdown of gases. | |
10. **Why** is the breakdown strength higher in electronegative gases compared to that in other gases?
11. **Mention** the Townsend's criterion for breakdown in electronegative gases?
12. **Explain** with drawing the streamer theory of breakdown in gases?



- 1) Transformer oil having a dielectric constant of 2.2 and a dielectric strength of 25 kV/mm, is used as an insulation of spacing 8 mm. **Determine** the maximum applicable voltage. A barrier of thickness 3 mm of transformer board with a dielectric strength of 50 kV/mm, dielectric constant of 4.4 is used in this space to increase the strength. **Does** the transformer board serve this purpose in this case?
- 2) In an experiment for determining the breakdown strength of transformer oil, the following observations were made. **Determine** the power law dependence between the gap spacing and the applied voltage of the oil.

Gap spacing (mm):	4	6	10	12
Voltage at breakdown(kV):	90	140	210	255
- 3) A solid specimen of dielectric has a dielectric constant of 4.2, and $\tan \delta$ as 0.001 at a frequency of 50 Hz. If it is subjected to an alternating field of 50 kV/cm, **Calculate** the heat generated in the specimen due to the dielectric loss.
- 4) A solid dielectric specimen of dielectric constant of 4.0, has an internal void of thickness 1 mm. The specimen is 1 cm thick and is subjected to a voltage of 80 kV (rms). If the void is filled with air and if the breakdown strength of air can be taken as 30 k V (peak)/cm, **Find** the voltage at which an internal discharge can occur.
- 5) **What** is "thermal breakdown" in solid dielectrics, and how is it practically more significant than other mechanisms?
- 6) **Explain** the different mechanisms by which breakdown occurs in solid dielectrics in practice. Then discuss how does the "internal discharge" phenomena lead to breakdown in solid dielectrics?
- 7) **What** are the demerits of liquids with solid impurities?
- 8) **Mention** the different recommendations and requirements which required during testing transformer oil for dielectric strength, and then **mention** the accepted value of dielectric strength for transformer oil?
- 9) **Mention** the different factors which affecting on the BDV for insulating Gases, liquids, and solids?



1) **Compute** the ground resistance for a hemisphere of 0.5, 1 and 2m diameter, at distances 2m, 10m and 100m from the center of the sphere. **Present** the results in both tabular and graphical formats and for different soil composition.

2) **Calculate** the ground resistance and the overlapping coefficient for the grounding system shown below in each figure, given that the earth resistivity $\rho=100 \Omega.m$, the length of the driven rod is 8 m, and its diameter is 6 cm. **Discuss** your results.




Fig. 1




Fig. 2




Fig. 3

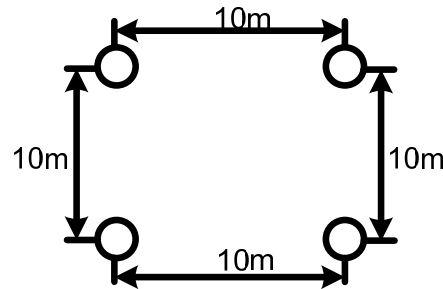


Fig. 4




Fig. 5

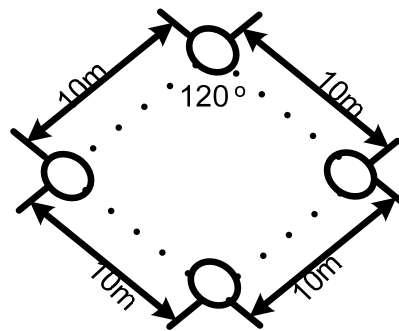


Fig. 6

3) If the earth resistance of a driven rod is 5Ω , and its diameter is 5 cm, **Calculate** the length of the driven rod, given that the earth resistivity $\rho=100 \Omega.m$.